

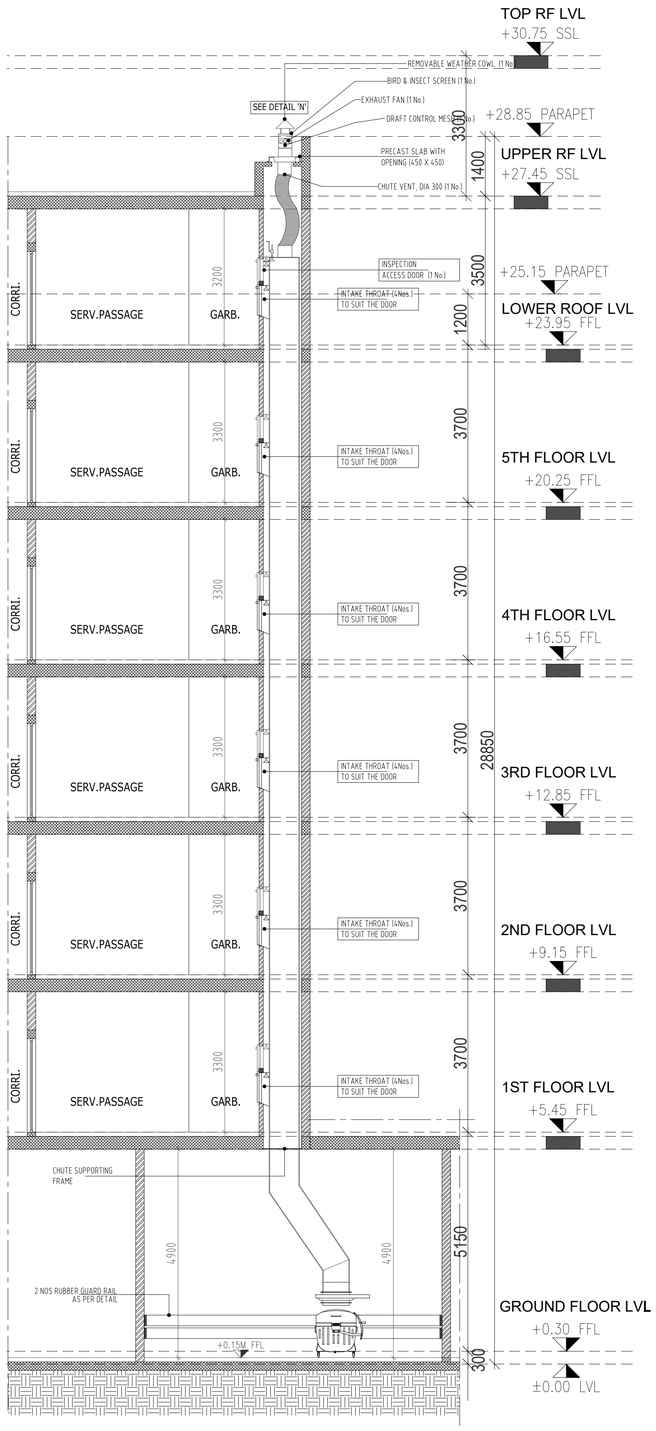


SECTION -A-A 1
SCALE-1:75 A-12-005

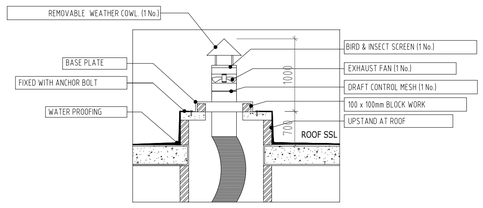


ROOF FIXATION & WATER PROOFING DETAIL 'N' 2
SCALE -1:75 A-12-005

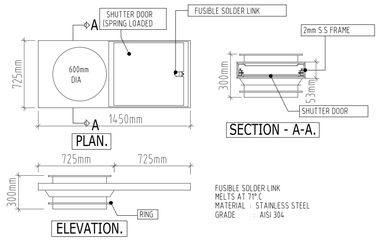


FIRE SHUTTER DOOR DETAILS 3
SCALE -1:75 A-12-005

NOTE
25 mm GAP TO BE PROVIDED BETWEEN THE CIVIL WORK AND INTAKE THROAT ON THE SIDES & TOP
40 mm GAP TO BE PROVIDED AT THE BOTTOM OF THE INTAKE THROAT.
THE 100mm BLOCKWORK IN FRONT OF THE CHUTE TO BE CONSTRUCTED ONLY AFTER THE COMPLETION OF GARBAGE CHUTE ERECTION AND PLUMBING & ELECTRICAL WORKS.

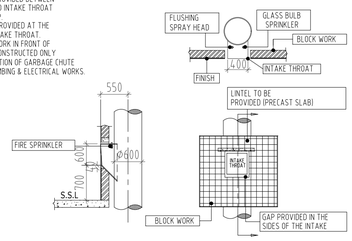


BLOCK WORK DETAILS 4
SCALE -1:75 A-12-005

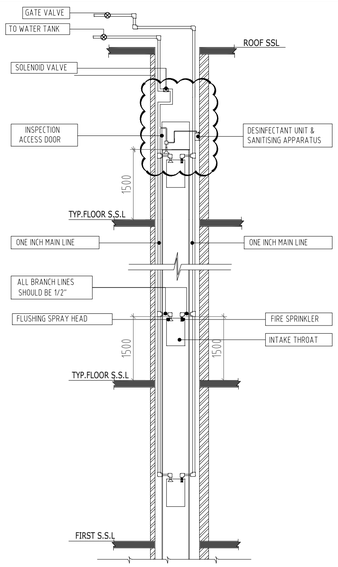

NOTE
PLUMBING LINES(FLUSHING & FIRE FIGHTING) TO BE LAID & CONNECTED TO OUR SOCKETS FITTED ON THE INTAKE THROAT, BY THE MAIN

PLUMBING DETAILS 5
SCALE -1:75 A-12-005

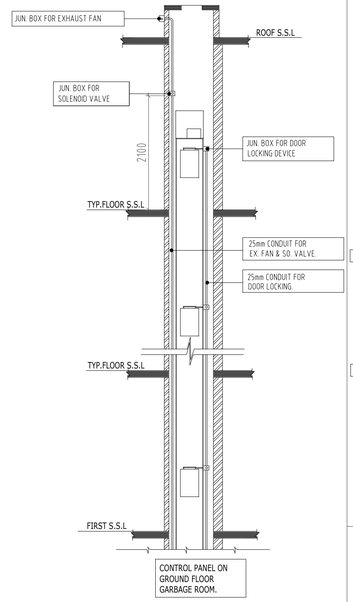


NOTE:--
JUN. BOX, 6, Nos. 3x3 INCH FOR EX.FAN, SOL.VALVE & DOOR LOCKING.
25 mm CONDUIT FOR EXHAUST FAN, SOL.VALVE & DOOR LOCKING.
ALL JUN.BOX,CONDUIT & SINGLE PHASE, ISOLATOR TO BE PROVIDED BY OTHERS.

ELECTRICAL DETAILS 6
SCALE -1:75 A-12-005

NOTE


1. THE SLAB OPENING ON TYPICAL FLOORS SHOULD BE 800 x 800mm (Min.)
2. THE 100mm BLOCKWORK IN FRONT OF THE CHUTE TO BE CONSTRUCTED ONLY AFTER THE COMPLETION OF GARBAGE CHUTE ERECTION, PLUMBING LINES & ELECTRICAL LINES.
3. PLUMBING LINES(FLUSHING & FIRE FIGHTING) TO BE LAID & CONNECTED TO OUR SOCKETS FITTED ON THE INTAKE THROAT, BY THE MAIN CONTRACTOR /MEP CONTRACTOR.
4. THE ELECTRICAL CONDUITS / WIRES TO BE LAID AND CONNECTED BY THE MAIN CONTRACTOR/MEP CONTRACTOR.
5. SINGLE PHASE ISOLATOR TO BE PROVIDED BY MAIN CONTRACTOR IN THE GARBAGE ROOM.
6. ALL DIMENSIONS ARE IN mm.

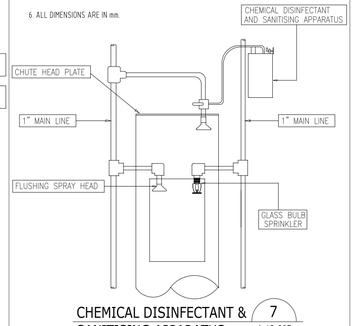

CHEMICAL DISINFECTANT & SANITISING APPARATUS 7
A-12-005


Specifications for Ostermeier Fze Garbage Chute System

1 No. Chute vent 300 mm	For the flat roof with a cap on top to guard against rain.
1 No. Axial Blowing Exhauster	Mounted in the vent tube to vent the chute .
1 No. Bird and Insect Screen	Fitted inside the chute vent to avoid any living objects to fall.
1 No. Draft Control Mesh	Fitted inside the chute vent to protect the exhauster from loose and flying particles.
1 No. Inspection Access Door	stainless steel (Grade 304) door situated on the top most floor above the garbage chute intake door.
1 No. Stainless Steel Chute Head Plate	With all necessary connections and holes for the flushing spray head and chute vent .
Automatic Flushing Spray Head	Used to clean the inside of the chute on every floor with powerful jet spray.
Chute Tube	600mm dia tube, fabricated from 1.5mm thick, stainless steel (Grade 304) sheets completely coated from outside for its entire length with a sound dampening material.
Chute Supporting Frames and Clamp Rings.	To support the chute tube at necessary slab openings.
Intake Throat	Stainless steel (Grade 304) intake throats, (Clear opening 600 x 400mm) designed to suit the bottom hinged intake doors on every floor.
Bottom Hinged Door	700 x 500mm, stainless steel (Grade 304) noiseless, self sealing, self closing with door locking device.
Offset for Chute Bottom	600mm dia fabricated from stainless steel (Grade 304), to suit the site condition. An additional reinforcement plate will be provided inside the chute offset.
Glass Bulb Sprinklers	Used for fire protection inside the chute and will be kept on every floor.
1No. Disinfecting and sanitizing Apparatus	Connected on the top of the chute head for cleaning the chute system.
1 No. Fire Shutter Door	This runs on smooth running rollers and held open by a fusible solder link which actuates 71deg.c
2 Nos. Garbage Trolley	These are hot to dipped galvanised, 2.5cu. m. municipality standard trolleys DIN 30738, fitted with a locking and lifting device, suitable for the municipality trucks.
1 No. Master Control Panel	The control panel is provided with necessary switches, relays, lights, etc. for the control of the chute system such as cleaning system & exhaust fan.

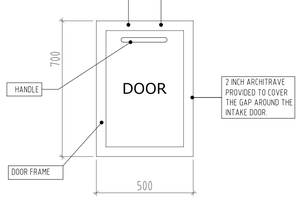


NOTE:--
MATERIAL
STAINLESS STEEL DOOR GRADE, 304.

DOOR DETAILS "A" 10
SCALE -1:75 A-12-005

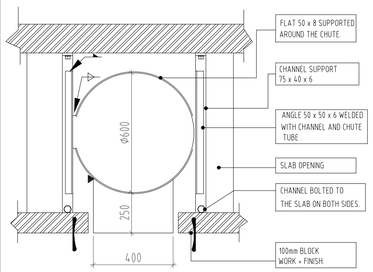


CHUTE SUPPORTING FRAME DETAILS 11
SCALE -1:75 A-12-005

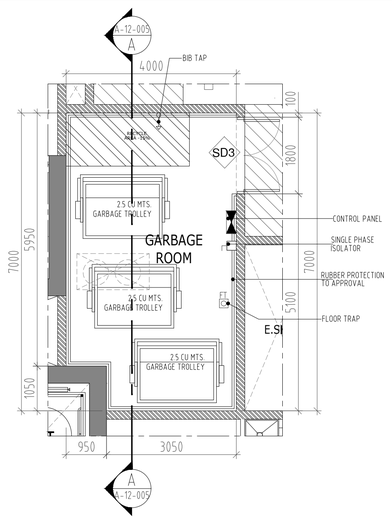

GARBAGE ROOM GROUND FLOOR PLAN 8
SCALE -1:75 A-12-005

NOTE:--
* FLOOR TRAP & WATER TAP IN THE TYPICAL FLOOR GARBAGE ROOM TO BE PROVIDED BY OTHERS.
* GARBAGE ROOM & CHUTE AS PER EHS REGULATION DD-11.0

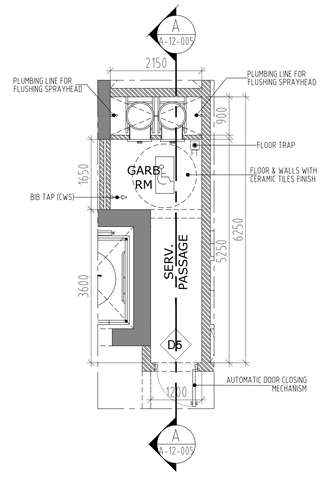

GARBAGE ROOM TYPICAL FLOOR PLAN - (1 - 10) 9
SCALE -1:75 A-12-005

NOTE:--
FIRE FIGHTING LINE : TO BE CONNECTED FROM THE BUILDING FIRE FIGHTING LINES.
THE ABOVE SAID LINES TO BE PROVIDED AND CONNECTED TO OUR CHUTE SYSTEM BY MEP/MAIN CONTRACTOR.

NOTE:--
FLOOR TRAP & WATER TAP IN THE TYPICAL FLOOR GARBAGE ROOM TO BE PROVIDED BY OTHERS.

SUMMARY FOR GARBAGE CONTAINER

CALCULATIONS	WEIGHT	NO.OF CONT.REQUIRED.
(TOTAL COMMERCIAL AREA= /1000) x12 KG	-	806.60 KG / 250 = 3.22 NOS = 3 NOS
(TOTAL OFFICES AREA = /1000)x 5 KG	-	
(TOTAL RESIDENTIAL AREA= 67218.97 SQ.FT/1000) x12 KG	806.60 KG	
		NO.OF CONT.PROVIDED
TOTAL WEIGHT =	806.60 KG	3 NOS.(CAP.2.5m3)

NOTES:

1. THIS DRAWING MAY NOT BE REPRODUCED BY ANY MEANS WITHOUT PRIOR APPROVAL FROM EMSQUARE
2. DRAWINGS ARE NOT TO BE SCALED, STATED DIMENSIONS ONLY ARE TO BE TAKEN.
3. ANY INCONSISTENCY OR DISCRIPANCY IS TO BE BROUGHT TO THE ATTENTION OF & RESOLVED BY THE ARCHITECT/ENGINEER BEFORE THE WORK IS PUT IN HAND.

DATE	DESCRIPTION	BY

CONSULTANT :

EMSQUARE
ENGINEERING CONSULTANTS
ARCHITECTS-CIVIL ENGINEERS-INTERIORS
P.O. Box 181903, Tel: +971 4 2729009, Fax: +971 4 2729334
Email: emsquare@emirates.net.ae

OWNER :

G F S REAL ESTATE L.L.C

JOB TITLE :

PROPOSED RESIDENTIAL BUILDING (B+G+5+ROOF)

PLOT NO. / PARCEL ID	BLOCK / COMMUNITY
5310319	SAIH SHUAIB 2

DRAWING TITLE :

GARBAGE ROOM DETAILS

ARCHITECT :	STRUCTURAL ENGR. :	DRAWN :
SMITHA		SHAFI
SCALE :	DATE :	CHECKED BY :
1:125	JUN-2025	BABU
JOB NO :	DRAWING NO. :	REVISION NO. :
—	A-12-005	..

: D:\ANJU PROJECTS 2023\PROJECTS\GFS\08. 5310319 - COVENTRY RESIDENCE 3 - G F S REAL ESTATE L.L.C\FINAL SUBMISSION\FINAL AUTHORITY SUB\ARCH\CAD\A-12-005 GARBAGE ROOM DETAILS.dwg