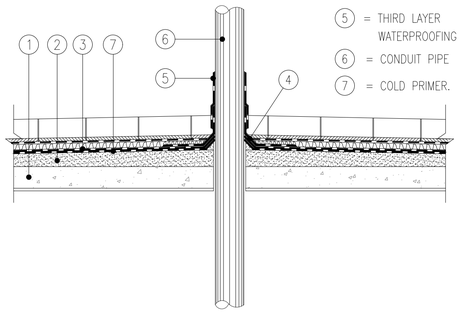
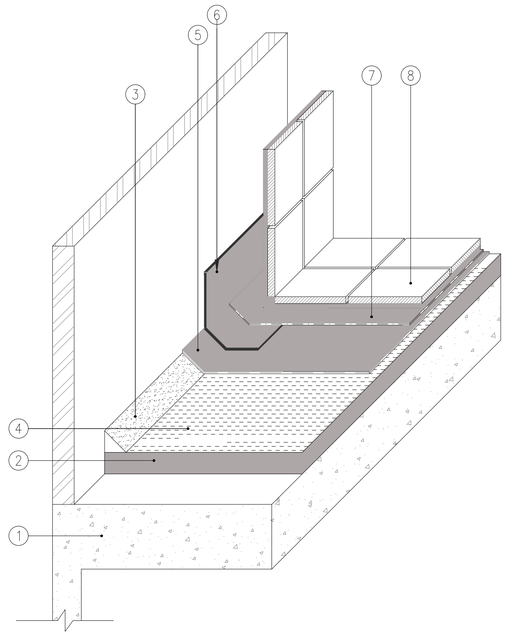


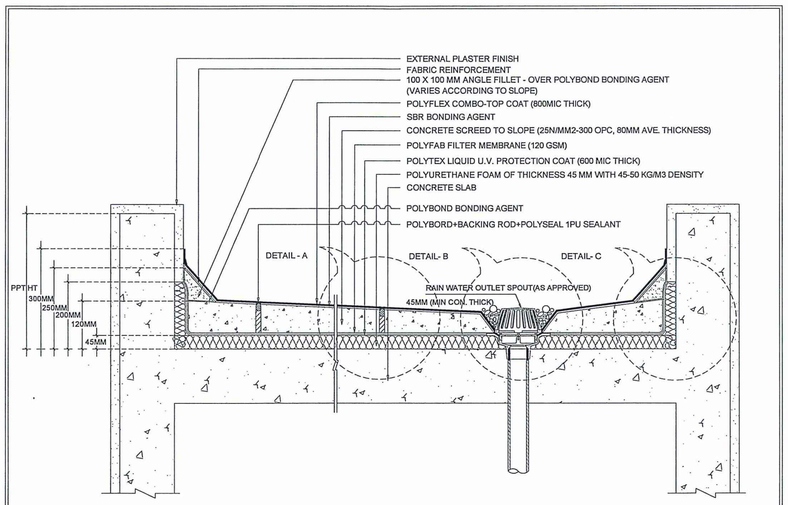

1 = RCC. SLAB
2 = FOAM CONCRETE.
3 = MAIN ROLE WATERPROOFING MEMBRANE–" ISOFLEX ".
4 = SECOND LAYER WATERPROOFING MEMBRANE– " ISOFLEX ".
5 = THIRD LAYER WATERPROOFING MEMBRANE– " ISOFLEX ".
6 = CONDUIT PIPE
7 = COLD PRIMER.

## TYPICAL ROOF WATERPROOFING DETAIL FOR ELECTRIC CABLE PIPE.



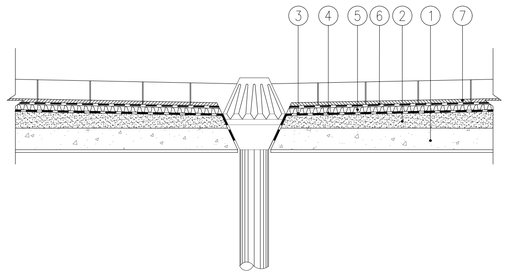

## TYPICAL WET AREA WATER PROOFING DETAIL.

## Typical Section Of Combo Roof System



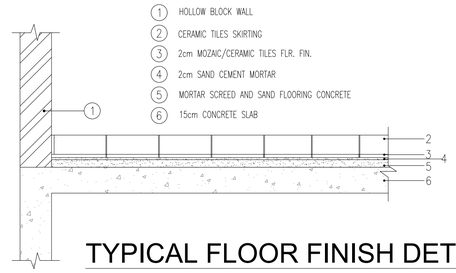

### METHODOLOGY FOR COMBO ROOF SYSTEM.

STEP-1 : CLEANING OF THE ROOF AREA USING COMPRESED AIR.
STEP-2 : COVERING THE PARAPET WALL (75CM HT) AND OTHER UTILITIES FIXED ON THE ROOF TO AVOID THE RISK OF OVER SPRAY.
STEP-3 : SPRAY APPLY POLYURETHANE FOAM OF AVERAGE THICKNESS 45 MM WITH DENSITY 45-50 KG/M3
STEP-4 : BRUSH/SPRAY APPLY U.V RESISTANT PROTECTIVE COATING ABOVE ENTIRE P.U FOAM SPRAYED AREA.
STEP-5 : LOOSELY LAY GEOTEXTILE SEPERATION AND PROTECTIVE LAYER 120 GSM WITH AN OVERLAP OF 30 CM
STEP-6: FIX RIDGES IN PANELS AND SLOPE (1:150-MAX) USING BITUMEN IMPREGNATED BOARDS AND CEMENT SAND MORTAR
STEP-7 : LAY PROTECTIVE SCREED CONCRETE (25N/MM2) TO SLOPE (1:150-MAX OR TO DRAWINGS)
STEP-8 : FIX BACKING ROD & HEAVY DUTY ELASTOMERIC POLYSEAL 1PU SEALANT TO ALL CONSTRUCTION JOINTS IN SCREED.
STEP-9 : FIX ANGLE FILLETS ALONG THE PARAPET, MECHANICAL DUCT OPENINGS AND PRE-UTILITY UPSTANDS.
STEP-10:APPLY FINAL COAT OF POLYFLEX (COMBO) CEMENTATIOUS PROTECTIVE COATING ABOVE SCREED & ANGLE FILLET (+50MM VERTICALLY).



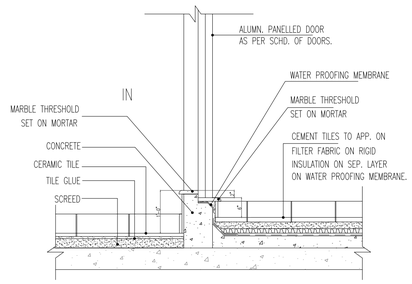

1 = RCC. SLAB
2 = LIGHT WEIGHT FOAM CONCRETE.
3 = 1COAT OIL PRIMER + 4mm. MEMBRANE " ISOFLEX ".
4 = 4mm. MEMBRANE " ISOFLEX ".
5 = THERMAL HEAT INSULATION – AS SPECIFIED.
6 = GEOTEXTILES " EDILFON" 150 gm./m2.
7 = 30x30x3cm. MOSAIC TILES ON MORTAR BED IN MAXI. 3x3m. BAYS WITH AND INCLUDING THE MOVEMENT JOINTS COMPRISING.

## TYPICAL WATERPROOFING DETAIL FOR RAIN WATER OUT-LET WITH INSULATION LAYER

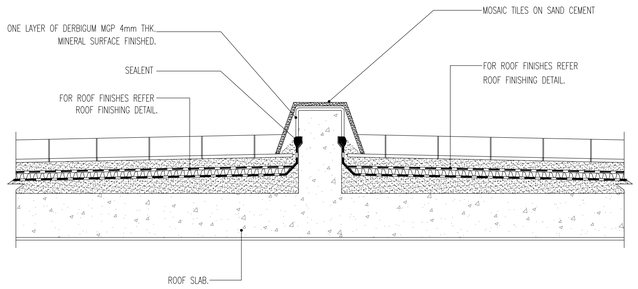



1 HOLLOW BLOCK WALL
2 CERAMIC TILES SKIRTING
3 2cm MOZAIC/CERAMIC TILES FLR. FIN.
4 2cm SAND CEMENT MORTAR
5 MORTAR SCREED AND SAND FLOORING CONCRETE
6 15cm CONCRETE SLAB

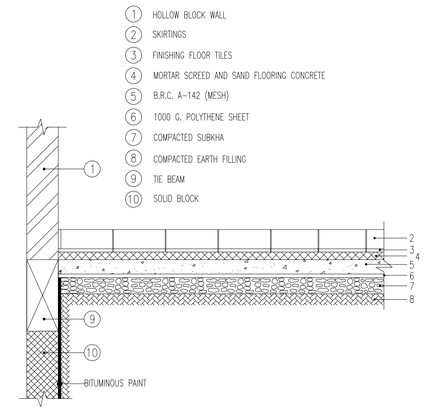
## TYPICAL FLOOR FINISH DETAILS




## TYP.THRESHOLD DETAIL - 3 [AT ROOF UPSTAND - DETAIL - R]




## DETAIL AT ROOF WATER TANK FOUNDATION.




1 HOLLOW BLOCK WALL
2 SKIRTINGS
3 FINISHING FLOOR TILES
4 MORTAR SCREED AND SAND FLOORING CONCRETE
5 B.R.C. A-142 (MESH)
6 1000 G. POLYTHENE SHEET
7 COMPACTED SUBKHA
8 COMPACTED EARTH FILLING
9 TIE BEAM
10 SOLID BLOCK

## GROUND FLOOR FINISH DETAILS

NOTES:

1. THIS DRAWING MAY NOT BE REPRODUCED BY ANY MEANS WITHOUT PRIOR APPROVAL FROM EMSQUARE
2. DRAWINGS ARE NOT TO BE SCALED, STATED DIMENSIONS ONLY ARE TO BE TAKEN.
3. ANY INCONSISTENCY OR DISCRIPANCY IS TO BE BROUGHT TO THE ATTENTION OF & RESOLVED BY THE ARCHITECT/ENGINEER BEFORE THE WORK IS PUT IN HAND.

| DATE | DESCRIPTION | BY |
|---|---|---|
| | | |
| | | |
| | | |

CONSULTANT :

EMSQUARE
ENGINEERING CONSULTANTS
ARCHITECTS-CIVIL ENGINEERS-INTERIORS
P.O. Box 181903, Tel: +971 4 2729009, Fax: +971 4 2729334
Email: emsquare@emirates.net.ae

OWNER :
G F S REAL ESTATE L.L.C

JOB TITLE :
PROPOSED RESIDENTIAL BUILDING (B+G+5+ROOF)

| PLOT NO. / PARCEL ID | BLOCK / COMMUNITY |
|---|---|
| 5310319 | SAIH SHUAIB 2 |

DRAWING TITLE :
WATERPROOFING DETAILS

| ARCHITECT : | STRUCTURAL ENGR. : | DRAWN : |
|---|---|---|
| SMITHA | | SHAFI |
| SCALE : | DATE : | CHECKED BY : |
| 1:75 | JUN-2025 | BABU |
| JOB NO : | DRAWING NO. : | REVISION NO. : |
| — | A-12-012 | .. |

: D:\ANJU PROJECTS 2023\PROJECTS\GFS\08. 5310319 - COVENTRY RESIDENCE 3 - G F S REAL ESTATE L.L.C\FINAL SUBMISSION\FINAL AUTHORITY SUB\ARCH\CAD\A-12-012 WATERPROOFING DETAILS.dwg