




TYP. END DETAIL OF SIMPLY SUPPORTED SLAB



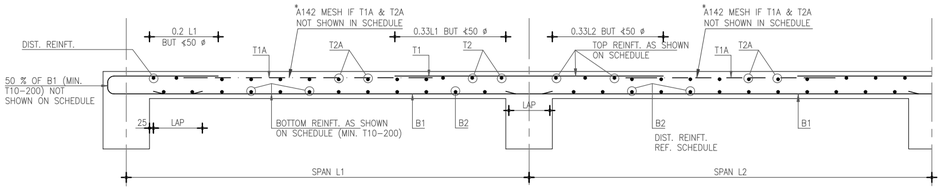

CONTINUOUS SLAB


* APPLICABLE FOR SLAB THICKNESS MORE THEN 250mm.

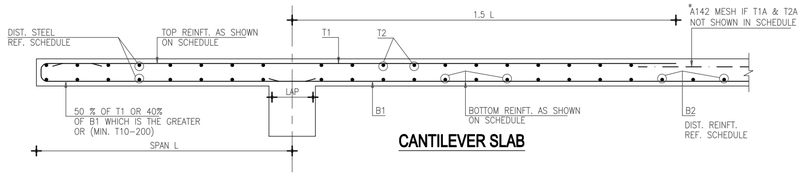

CANTILEVER SLAB

CURTAILMENT OF REINFORCEMENT IN CAST IN-SITU SLABS


1 / S/002

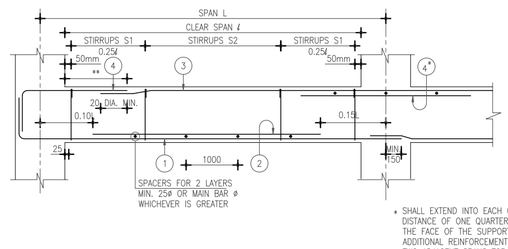


* SHALL EXTEND INTO EACH OF THE ADJACENT SPANS BY A DISTANCE OF ONE QUARTER OF THE GREATER SPAN FROM THE FACE OF THE SUPPORT BUT NOT LESS THAN 50 DIA. ADDITIONAL REINFORCEMENT TO BE THE GREATER OF THE TWO ADJACENT SPANS TOP REINFORCEMENT.

** 0.15L (BUT NOT LESS THAN 50 DIA. FROM THE FACE OF SUPPORT)

BEAM TYPE - 1

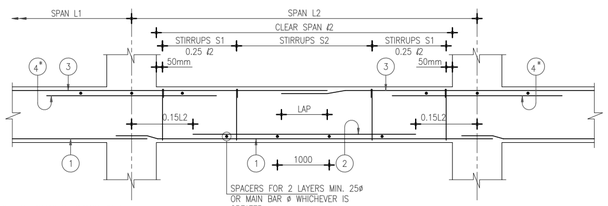

BEAM TYPE - 2

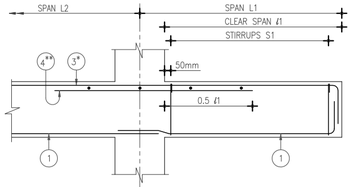


* SHALL EXTEND INTO SPAN L2 BY A DISTANCE OF 1.5L1 OR 0.33L2, WHICHEVER IS GREATER FROM THE FACE OF THE SUPPORT BUT NOT LESS THAN 50 DIA.

** SHALL EXTEND INTO SPAN L2 BY A DISTANCE OF 0.75 L1 OR 0.25L2, WHICHEVER IS GREATER FROM THE FACE OF THE SUPPORT BUT NOT LESS THAN 50 DIA.

BEAM TYPE - 3

LEGEND:

1) CONTINUOUS BOTTOM BARS
2) ADDITIONAL AT MID SPAN
3) CONTINUOUS TOP BARS
4) ADDITIONAL AT SUPPORT



BEAM SECTION TYPE - 4

SIDE REINFORCEMENT

FOR BEAMS DEEPER THAN 750 (OVERALL) AND FOR EXTERNAL FACES ONLY OF ALL OTHER BEAMS PROVIDE SIDE REINFORCEMENT AS FOLLOWS:

WIDTH OF BEAM	SIDE REINFT.
200	T12–250
250	T12–225
300	T12–200
≥400	T12–150

NOTES:


1. FOR DETAILS OF BARS SEE BEAM SCHEDULE.
2. MAXIMUM CLEAR DISTANCE BETWEEN LONGITUDINAL BARS = 160mm.

TYPICAL SUSPENDED BEAM DETAILS


2 / S/002

NOTES :

1. THIS DRAWING MAY NOT BE REPRODUCED BY ANY MEANS WITHOUT PRIOR APPROVAL FROM EMSQUARE
2. DRAWINGS ARE NOT TO BE SCALED,STATED DIMENSIONS ONLY ARE TO BE TAKEN.
3. ANY INCONSISTENCY OR DISCRIPANCY IS TO BE BROUGHT TO THE ATTENTION OF & RESOLVED BY THE ARCHITECT/ENGINEER BEFORE THE WORK IS PUT IN HAND.

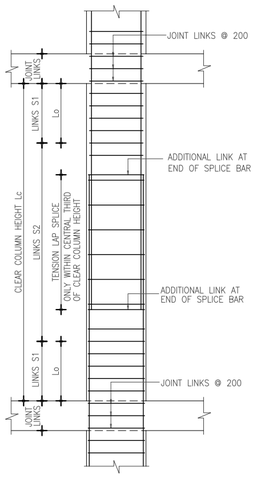


INTERMEDIATE LEVEL

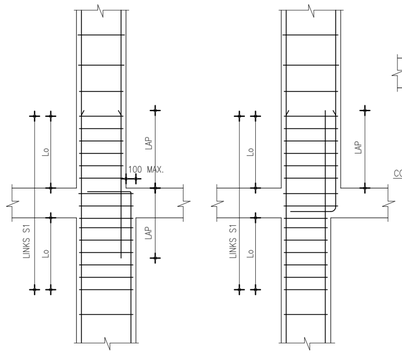

CASE-1 CASE-2

ASYMMETRICAL COLUMN JUNCTIONS





TOP LEVEL

NOTES:


1. FOR DETAILS OF BARS REFER TO COLUMN SCHEDULES
2. MINIMUM MAIN BAR DIAMETER = 16mm.
3. Lo = LARGEST OF 1) h
   2) 0.2Lc
   3) 500mm

   WHERE h IS THE LARGER COLUMN PLAN DIMENSION






FOUNDATION LEVEL

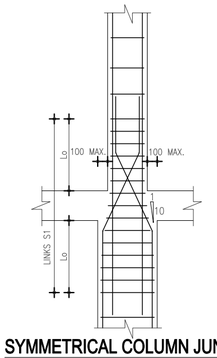


SYMMETRICAL COLUMN JUNCTION

TYPICAL COLUMN DETAILS

3 / S/002



DETAIL OF "U" BARS AT SLAB EDGE

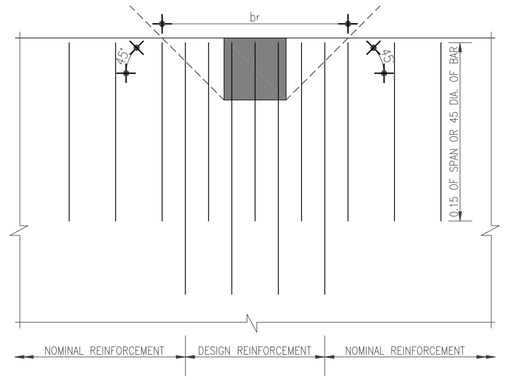


DISTRIBUTION OF REINFORCEMENT AT SLAB EDGE

NOTE:–
ONLY THOSE BARS PLACED WITHIN A WIDTH "br" SHOULD BE CONSIDERED TO PROVIDE MOMENT TRANSFER TO THE EDGE COLUMN AS SHOWN.

TYPICAL SLAB EDGE REINFORCEMENT ARRANGEMENT IN FLAT SLAB

4 / S/002

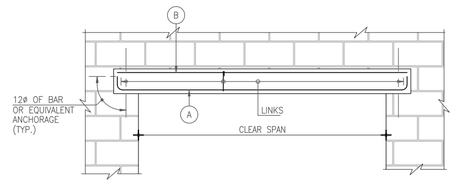

SCHEDULE OF LINTELS UNO.

CLEAR SPAN WIDTH	LINTEL SIZE		REINFORCEMENT		
	WIDTH	DEPTH	A	B	LINKS
< 2500	200/300	200	2T16	2T16	T10–150
>2500 <4500	200/300	300	2T16	2T16	T10–150
< 2500	400	300	3T16	3T16	T10–150
>2500 <4500	400	300	4T16	4T16	T10–150

NOTES:

1. BEARING ON BLOCK WALL ON EITHER SIDE OF OPENING SHALL BE AT LEAST EQUAL TO THE OVERALL DEPTH OF THE LINTEL.
2. OVERALL LINTEL DEPTHS COULD BE INCREASED TO SUIT BLOCK–WORK COURSING.

TYPICAL LINTEL DETAILS

5 / S/002

(NON LOAD BEARING BLOCK WALLS)

DATE	DESCRIPTION	REV.	BY
13.04.2026	FOR AUTHORITY APPROVAL	00	MS

CONSULTANT :

EMSQUARE
ENGINEERING CONSULTANTS
ARCHITECTS-CIVIL ENGINEERS-INTERIORS
P.O. Box 181903, Tel: +971 4 2729009, Fax: +971 4 2729334
Email: emsquare@emirates.net.ae

OWNER :

G F S REAL ESTATE L.L.C

JOB TITLE :

PROPOSED RESIDENTIAL BUILDING (B+G+5+ROOF)

PLOT NO. / PARCEL ID	BLOCK / COMMUNITY
5310319	SAIH SHUAIB 2

DRAWING TITLE : STANDARD DETAILS - SHEET-1

ARCHITECT :	STRUCTURAL ENGR. :	DRAWN :
SHAFI	Eng.Vincent	MUFADDAL
SCALE :	DATE :	CHECKED BY :
	13.04.2026	Eng.Vincent
JOB NO :	DRAWING NO. :	REVISION NO. :
—	S-01_1	

PRINTED BY :USER-4.-STRUCTURE GFS B+G+5+ROOF R00.DWG -APRIL\13\2026 - 2:45PM)