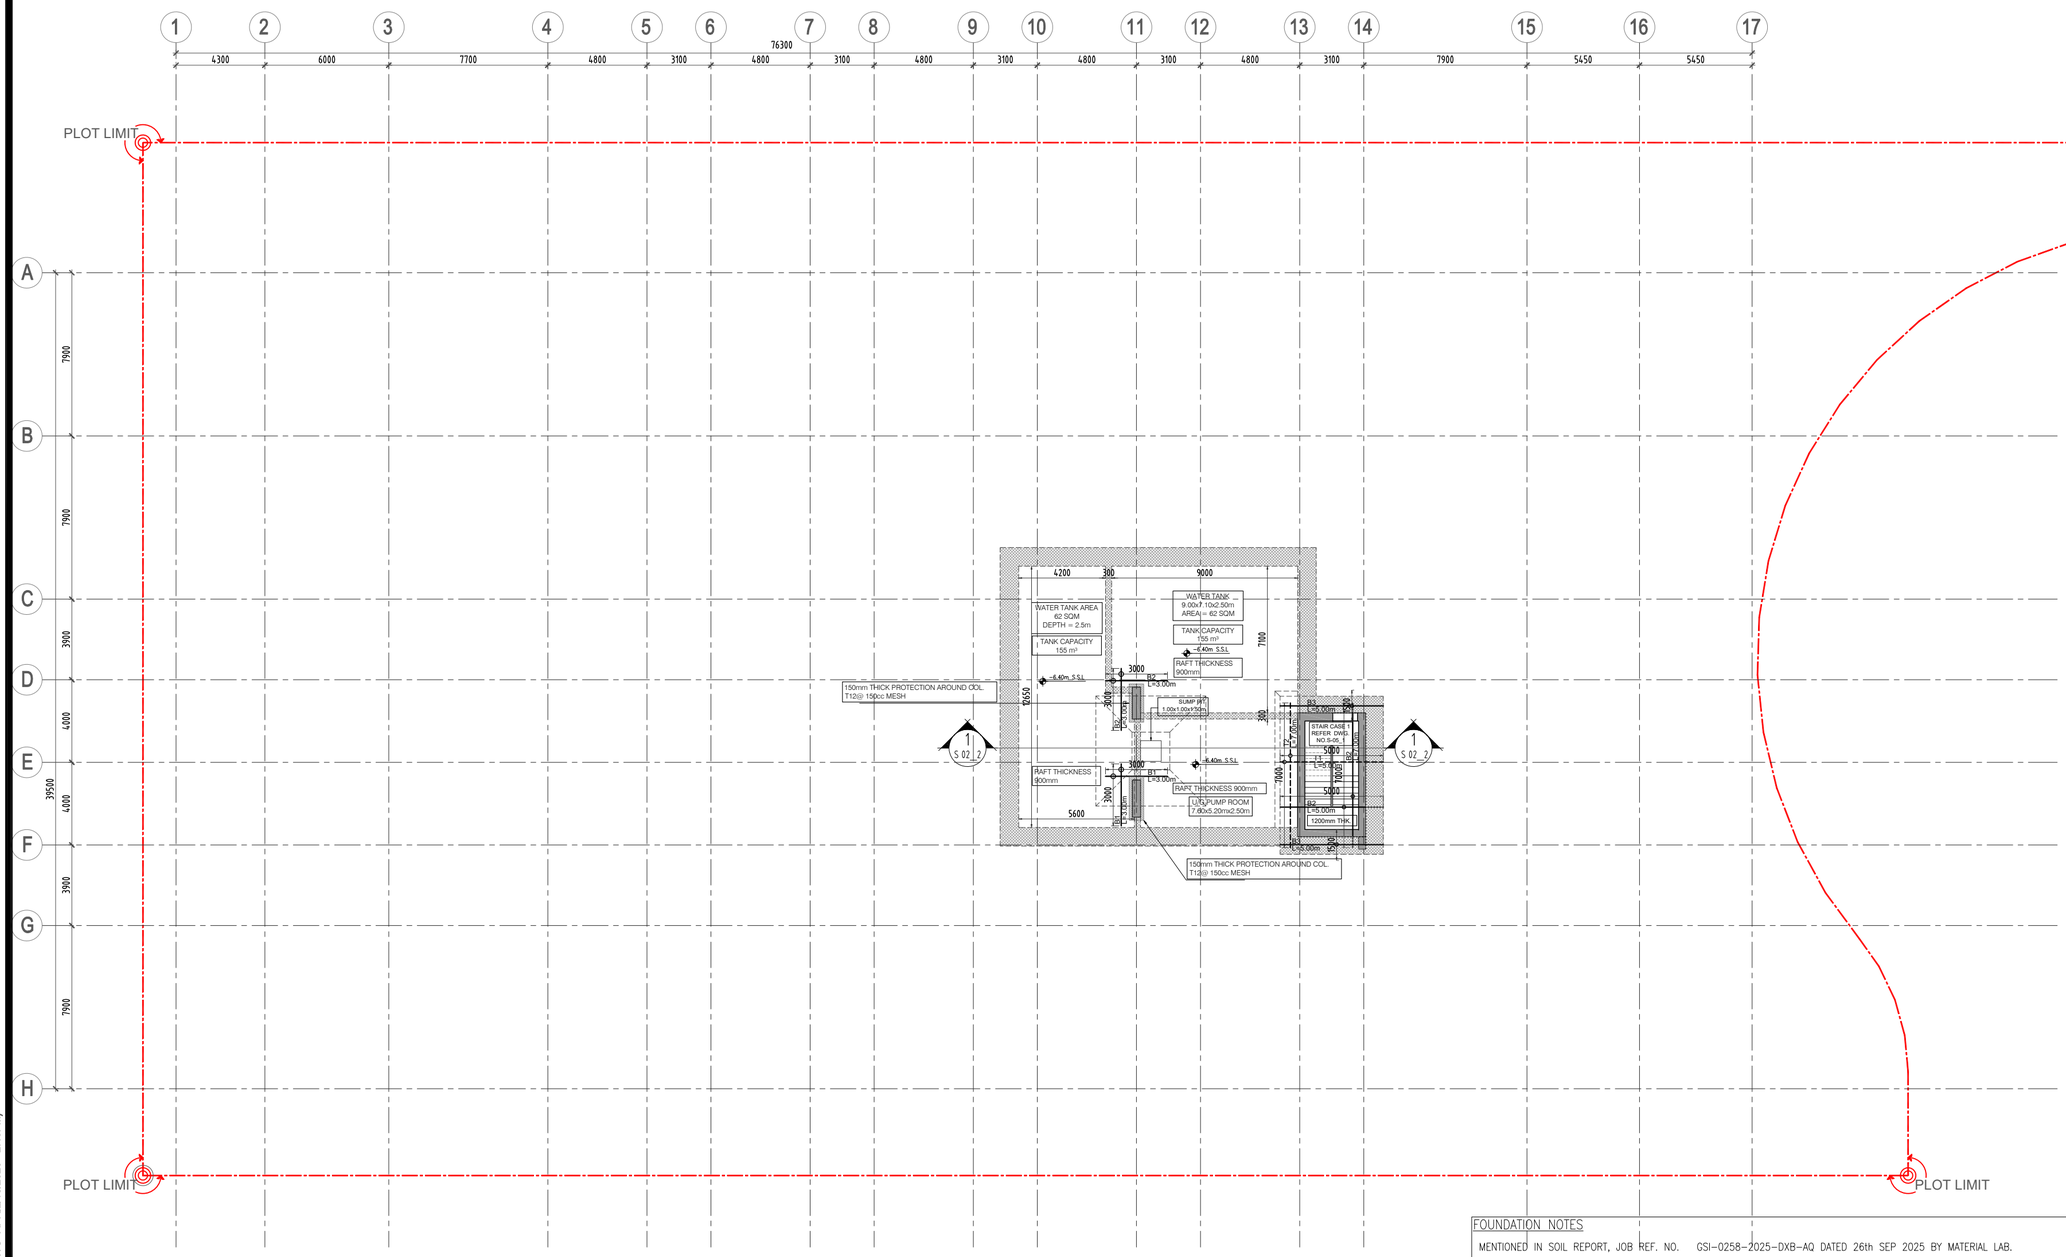


NOTES :

1. THIS DRAWING MAY NOT BE REPRODUCED BY ANY MEANS WITHOUT PRIOR APPROVAL FROM EMSQUARE
2. DRAWINGS ARE NOT TO BE SCALED,STATED DIMENSIONS ONLY ARE TO BE TAKEN.
3. ANY INCONSISTENCY OR DISCRIPANCY IS TO BE BROUGHT TO THE ATTENTION OF & RESOLVED BY THE ARCHITECT/ENGINEER BEFORE THE WORK IS PUT IN HAND.
4. LOADING PLAN PLEASE REFERS TO L-01_1 - L-01_10.

COLUMN LEGEND	
COLUMN CONTINUING	
COLUMN STOPPING	
COLUMN STARTING	

SCHEDULE OF SLABS

SLAB MARK	SLAB THICKNESS	REINFORCEMENT	LOCATION	REMARKS
S1	250mm THK.	T12@150 B/W-T&B	UPPER ROOF	RC SLAB
S2	300mm THK.	T16@120 B/W-T&B		RC SLAB
S3	300mm THK.	T20@120 T&B	UNDERGROUND WATER TANK	RC SLAB

EXTRA REINF. DETAILS

BARS TYPE	BOTTOM BARS/m	REMARKS	BARS TYPE	TOP BARS/m	REMARKS
B1	T20@150mm C/C	- - -	T1	T20@200mm C/C	- - -
B2	T25@150mm C/C	- - -	T2	T25@150mm C/C	- - -
B3	T32@100mm C/C	(2ND LAYER)	T3	T32@150mm C/C	- - -

RAFT REINF. DETAILS

RAFT THK.	BOTTOM	TOP
450/700/900mm	T20@150 c/c	T20@200 c/c
1200mm	T25@100 c/c	T20@150 c/c

REINFORCEMENT LEGEND

TOP REINF.	- - - - - - -
BOTTOM REINF.	———————

FOUNDATION NOTES

MENTIONED IN SOIL REPORT, JOB REF. NO. GSI-0258-2025-DXB-AQ DATED 26th SEP 2025 BY MATERIAL LAB.

1. SBC OF SOIL FOR RAFT FOUNDATION IS 300 kN/M² @ DEPTH 4.00-4.50m. AND FOR ISOLATED FOOTING IS 150 kN/M² @ DEPTH 1.50-2.00m. ALL OTHER RECOMMENDATION TO BE FOLLOWED. IT IS THE RESPONSIBILITY OF THE MAIN CONTRACTORS TO TEST AND ENSURE THE DESIGN BEARING PRESSURE AT SITE.
2. PLATE LOAD TEST AS PER FALCON SPECIALISTS RECOMMENDATION IS REQUIRED TO VALIDATE THE DESIGN PRESSURE SHALL BE APPROVED BY ENGINEER & AUTHORITY.
3. THE GROUND WATER TABLE WAS ENCOUNTERED AT DEPTH APPROXIMATELY (7.05m-7.41m) DEPTH BELOW EXISTING GROUND LEVEL
4. DEWATERING IS CONTRACTORS RESPONSIBILITY, AS REQUIRED.
5. FOLLOW SOIL IMPROVEMENT,FILL & SUB-BASE RECOMMENDATION AS PER SOIL REPORT
6. DESIGN IS IN ACCORDANCE WITH THE(BS/ACI) STANDARD CODE OF PRACTICE FOR DESIGN AND CONSTRUCTION REQUIREMENTS FOR REINFORCED CONCRETE
7. FOUNDATION WATER PROOFING COURSE (WPC) SHALL BE AS PER SPECIFICATION AND AS PER MANUFACTURE RECOMMENDATION APPROVED WITH 20 YEARS WARRANTY. WPC, ABOVE WATER TABLE USE 2 COAT OF BITUMINOUS PAINT, BELOW WATER TABLE SBS/PVC/SPRAY MEMBRANE, UNO.
8. EXTRA TOP AND BOTTOM REINFORCEMENT SHOWN ON PLAN
9. FOR THE BASIC MESH TOP STEEL SHALL BE SPLICED NEAR THE COLUMNS/WALL WITH A MIN. LAP LENGTH OF (60 TIMES) BAR DIAM. WHILE BOTTOM STEEL SHALL BE SPLICE IN THE MIDDLE OF SPAN WITH A MIN. LAP LENGTH OF (60 TIMES)
10. BOTH TOP & BOTTOM STEEL MESH SPLICING SHALL BE STAGGERED.
11. SHORING DESIGN SHOWN ARE INDICATIVE, SHALL BE DESIGNED BY A SPECIALIST AS PER SITE CONDITION AND SOIL REPORT APPROVED BY ENG. AND AUTHORITY

DATE	DESCRIPTION	REV.	BY
13.04.2026	FOR AUTHORITY APPROVAL	00	MS

CONSULTANT :

EMSQUARE
ENGINEERING CONSULTANTS
ARCHITECTS-CIVIL ENGINEERS-INTERIORS
P.O. Box 181903, Tel: +971 4 2729009, Fax: +971 4 2729334
Email: emsquare@emirates.net.ae

OWNER :

G F S REAL ESTATE L.L.C

JOB TITLE :

PROPOSED RESIDENTIAL BUILDING (B+G+5+ROOF)

PLOT NO. / PARCEL ID	BLOCK / COMMUNITY
5310319	SAIH SHUAIB 2

DRAWING TITLE : U/G WATER TANK FOUNDATION LAYOUT

ARCHITECT :	STRUCTURAL ENGR. :	DRAWN :
SHAFI	Eng.Vincent	MUFADDAL
SCALE :	DATE :	CHECKED BY :
1:150	13.04.2026	Eng.Vincent
JOB NO :	DRAWING NO. :	REVISION NO. :
—	S-02_1	

PRINTED BY :USER-4.-STRUCTURE GFS B+G+5+ROOF R00.DWG -APRIL/13/2026 - 2:46PM)