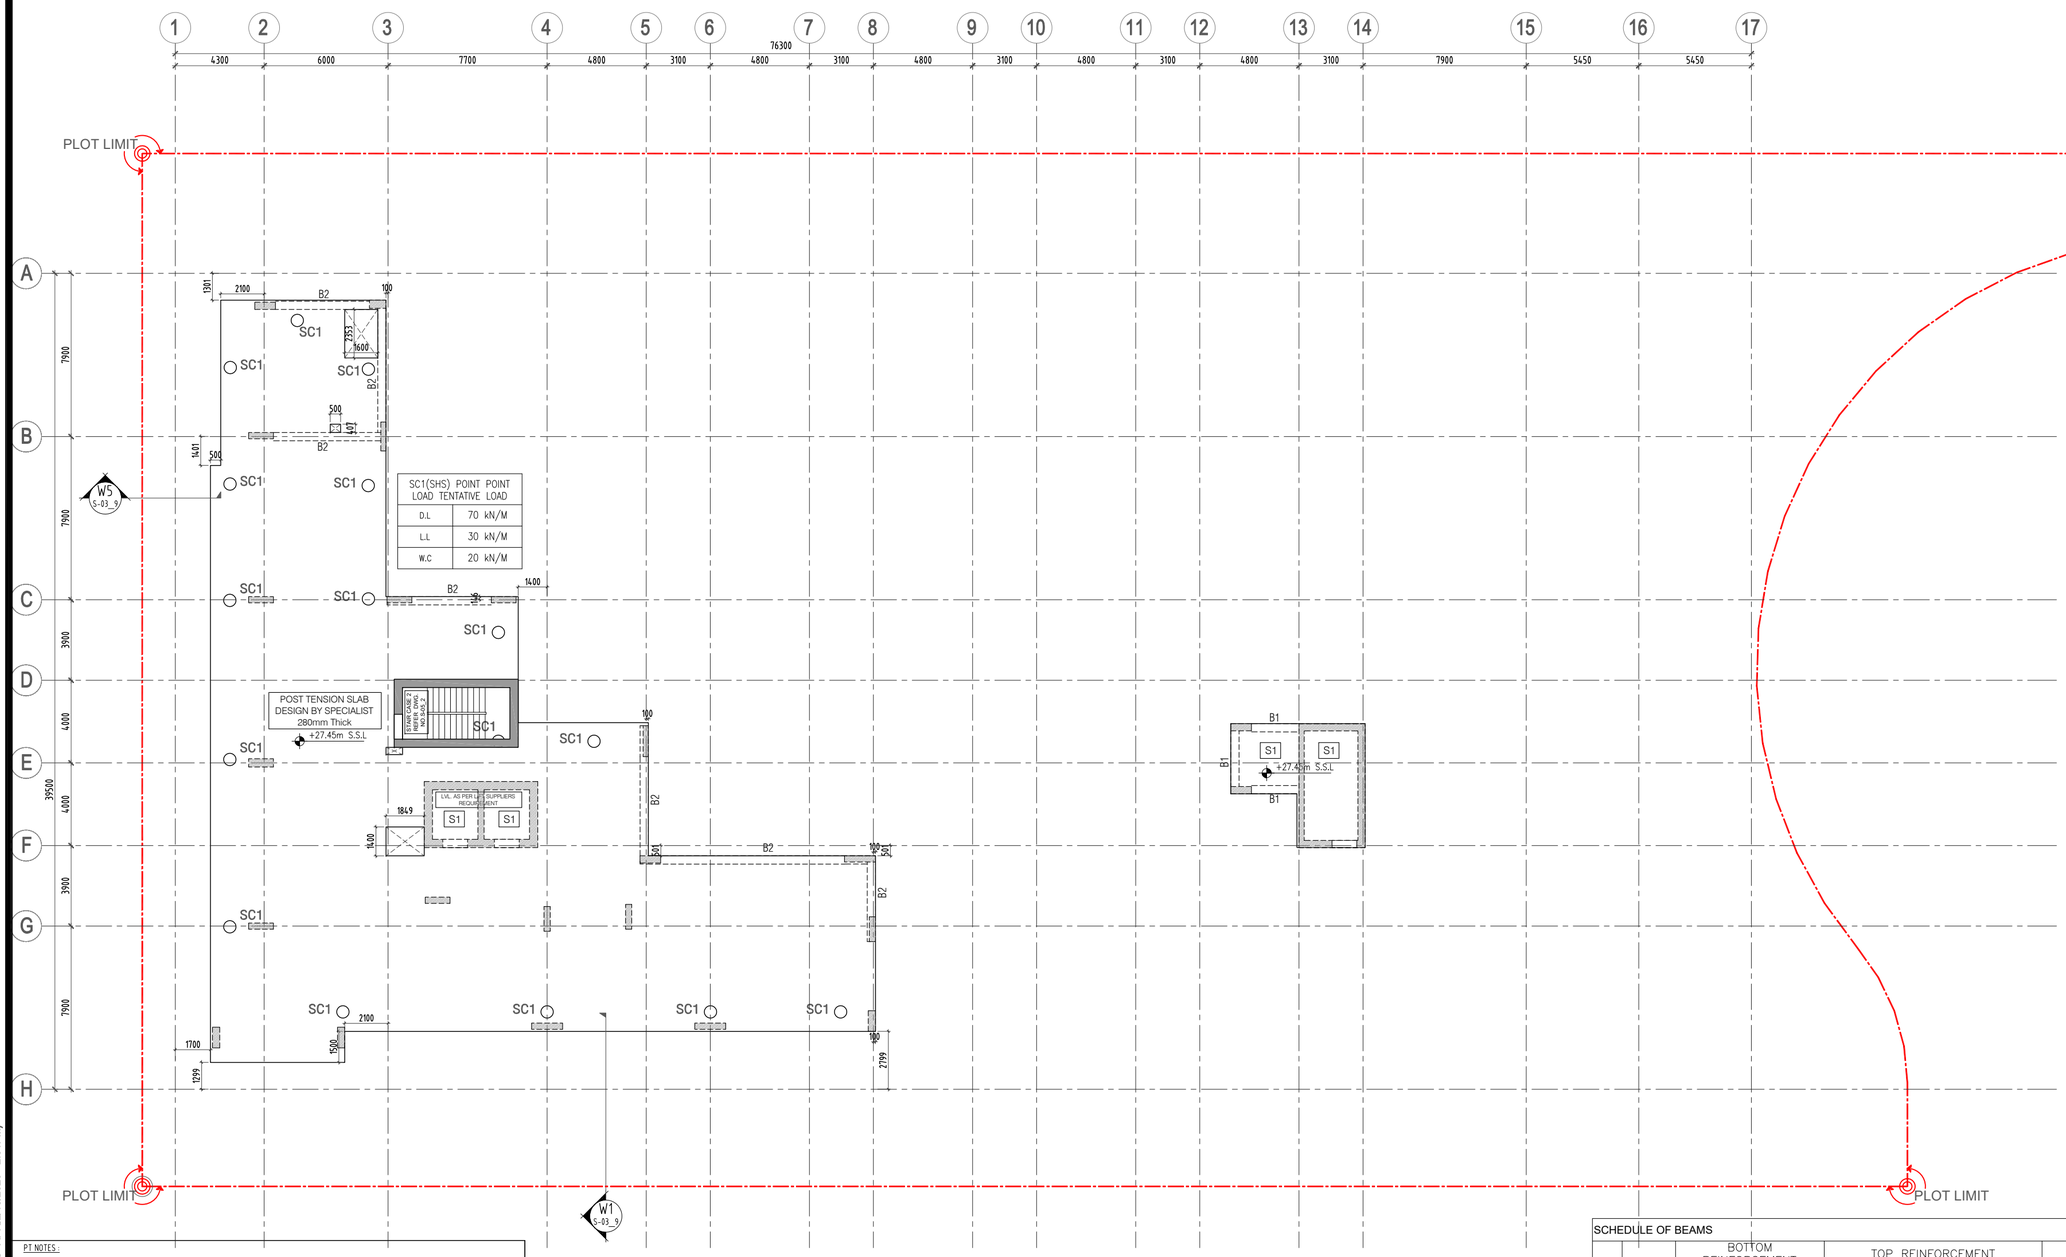


PT NOTES :

1. ADDITIONAL AND ACTUAL LOADING OF ALL ARCHITECTURAL FEATURES ON EXTERNAL ENVELOPE OF THE BUILDING TO BE CONSIDERED AND AS PER ASCE DESIGN STRICTLY

   AS PER ACI LATEST VERSION.
2. ALL BLOCK WALL & GLAZED CURTAIN WALLS TO BE COORDINATED WITH ARCHITECTURAL DRAWING.
3. THE CHANGE IN SIZES SHOULD NOT IMPAIR THE ARCHITECTURAL DESIGN INTENT.
4. SPACING AND PROVISION OF NON PRESTRESSED REINFORCEMENT AND TENDONS SHOULD BE SUFFICIENTLY ADEQUATE IN BOTH DIRECTION TO PREVENT CRACKING DUE TO SHRINKAGE.
5. ALL SECTION DETAILS, PROFILES, LEVELS & OPENINGS TO BE COORDINATED WITH ARCHITECTURAL & MEP DRAWINGS.
6. UNLESS NOTED OR DETAILED OTHERWISE, THE WHOLE SLAB AND BEAMS ARE POST TENSIONED FOR THE THICKNESS OF SLABS REFER GA PLANS.BEAMS AROUND CUT-OUTS CAN BE FURTHER COORDINATED WITH ARCHITECTURAL DRAWINGS.
7. THE POST TENSIONED SLAB AND BEAMS SHALL BE DESIGNED AS PER ACI LATEST VERSION AND TO THE LOADS GIVEN IN LOADING PLAN COMPLYING WITH RELEVANT DESIGN STANDARDS & REQUIREMENTS AND LOCAL AUTHORITY REGULATIONS BY A SPECIALIST SUB CONTRACTOR.COMPLETE SHOP DRAWINGS AND DESIGN CALCULATIONS SHALL BE SUBMITTED TO CONSULTANT FOR REVIEW SUBSEQUENTLY TO AUTHORITY AS A SEPARATE PACKAGE, IN WELL ADVANCE OF STARTING ANY RELATED WORKS AT SITE ANY CONVENTIONAL RC BEAMS, DROPS OR UPSTAND WHICH ARE NOT DETAILED SHALL BE DESIGNED BY THE PT SUBCONTRACTOR.
8. ALL WALLS ARE THERMAL INSULATED BLOCK AUTOCLAVED AERATED BLOCK (ACC) WITH DENSITY NOT MORE THAN 1100Kg/m^3. UNLESS NOTED OTHERWISE REFER ARCHITECTURAL DRAWING FOR WALL TYPE.
9. LIVE LOAD FOR PT SLABS MIN 3kN/M^2(MINIMUM)
10. PT SLAB, SHALL CATER 20°C TEMPERATURE AND A MINIMUM MESH OF T10@200mm c/c. UNO MINIMUM ADDITIONAL REBAR OF T16@150mm c/c SHALL BE PROVIDED AT SUPPORTS TOP AND BOTTOM, ENSURING HIGHER SEISMIC AND WIND ULTIMATE REBAR IN ADDITION TO PT GRAVITY DESIGN AS PER ANALYSIS IS MODEL, STRUCTURAL ENGR. FOR AUTHORITY APPROVAL
11. POUR STRIPS SHALL BE DESIGNED AND DETAILS BY PT SPECIALIST AND ENSURE IT IS EXECUTED WELL AT SITE

SCHEDULE OF SLABS

SLAB MARK	SLAB THICKNESS	REINFORCEMENT	LOCATION	REMARKS
S1	250mm THK.	T12@150 B/W-T&B	UPPER ROOF	RC SLAB
S2	300mm THK.	T16@120 B/W-T&B		RC SLAB
S3	300mm THK.	T20@120 T&B	UNDERGROUND WATER TANK	RC SLAB

SCHEDULE OF BEAMS

TYPE	SIZE BxD	BOTTOM REINFORCEMENT		TOP REINFORCEMENT			SIDE BARS	STIRRUPS	REMARKS
		CONTINUOUS	EXTRA AT MID SPAN	CONTINUOUS	EXTRA AT CONT. SUPPORT	EXTRA AT END SUPPORT			
B1	400 x 500	4 T 20	3 T 20	4 T 20	3 T 20	3 T 20	----	4LT10@150 c/c	
B2	400 x 800	4 T 20	3 T 20	4 T 20	3 T 20	3 T 25	T12@150	4LT12@150 c/c	
B3	400 x 1000	4 T 25	3 T 25	4 T 25	4 T 25	4 T 25	T16@150	4LT12@150 c/c	
B4	400 x 1500	4 T 25	3 T 25	4 T 25	4 T 25	4 T 25	T16@120	4LT12@150 c/c	
CB1	400 x 800	NOT USED							
CB2	400 x 1000	4 T 25	----	4 T 25	4 T 25	----	T16@150	4LT12@150	
PTB1	800 x 600	DESIGN BY PT SPECIALIST							
PTB2	700 x 600	DESIGN BY PT SPECIALIST							
PTB2A	700 x 650	DESIGN BY PT SPECIALIST							
PTB3	1000 x 600	DESIGN BY PT SPECIALIST							
CPTB2	800 x 600	DESIGN BY PT SPECIALIST							

NOTES :

1. THIS DRAWING MAY NOT BE REPRODUCED BY ANY MEANS WITHOUT PRIOR APPROVAL FROM EMSQUARE
2. DRAWINGS ARE NOT TO BE SCALED,STATED DIMENSIONS ONLY ARE TO BE TAKEN.
3. ANY INCONSISTENCY OR DISCRIPANCY IS TO BE BROUGHT TO THE ATTENTION OF & RESOLVED BY THE ARCHITECT/ENGINEER BEFORE THE WORK IS PUT IN HAND.
4. LOADING PLAN PLEASE REFERS TO L-01_1 - L-01_10.

DATE	DESCRIPTION	REV.	BY
13.04.2026	FOR AUTHORITY APPROVAL	00	MS

CONSULTANT :

EMSQUARE
ENGINEERING CONSULTANTS
ARCHITECTS-CIVIL ENGINEERS-INTERIORS
P.O. Box 183903, Tel: +971 4 2729099, Fax: +971 4 2729334
Email: emsquare@emirates.net.ae

OWNER :

G F S REAL ESTATE L.L.C

JOB TITLE :

PROPOSED RESIDENTIAL BUILDING (B+G+5+ROOF)

PLOT NO./ PARCEL ID	BLOCK / COMMUNITY
5310319	SAIH SHUAIB 2

DRAWING TITLE : UPPER ROOF TO TOP ROOF SLAB & BEAM LAYOUT

ARCHITECT :	STRUCTURAL ENGR. :	DRAWN :
SHAFI	Eng.Vincent	MUFADDAL
SCALE :	DATE :	CHECKED BY :
1:150	13.04.2026	Eng.Vincent
JOB NO :	DRAWING NO. :	REVISION NO. :
---	S-03_7	

PRINTED BY USER-4.-STRUCTURE GFS B+G+5+ROOF R00.DWG -APRIL/13/2026 - 2:51PM)