
A-07-007 TYP ( 4 - 5 ) FLOOR PLAN - take-off markup. 23 grid bays matched by label to dimensions stated on other sheets, spread 0.19%; effective scale 1:152.4 (title block 1:150)

TAKE-OFF ON THIS SHEET (trade colours)
- D-A 48.63 m2 Walls, 150mm thick
- D-B 3,244.69 m2 Walls, 200mm thick
- D-C 5.22 m2 Walls, 200mm thick, balcony partition, 1
- D-D 2,016.38 m2 Walls, 100mm thick
- G-B 217.00 m2 To horizontal surfaces, balconies
- G-D 285.04 m2 Horizontal surfaces
- H-H D-1: 2 tag(s) here - count OPEN
- H-J D-2: 38 tag(s) here - count CLOSED
- H-K D-5: 5 tag(s) here - count CLOSED
- H-L D-3: 4 tag(s) here - count CLOSED
- H-M D-4: 42 tag(s) here - count CLOSED
- H-Q DW 03: 31 tag(s) here - count CLOSED
- H-R DW 04: 4 tag(s) here - count CLOSED
- H-S DW 05: 1 tag(s) here - count CLOSED
- H-T DW 06: 2 tag(s) here - count CLOSED
- H-V DW 08: 2 tag(s) here - count CLOSED
- H-W DW 09: 2 tag(s) here - count CLOSED
- J-C 285.04 m2 To floors, bathrooms and toilets
- J-D 1,825.56 m2 To floors, apartments
- J-E 336.86 m2 To floors, corridors and lobbies
- J-F 38.18 m2 To floors, service rooms
- J-G 706.56 m To walls, bathrooms and toilets
- J-H 2,442.54 m To walls, apartments
- J-J 446.60 m To walls, corridors and lobbies
- J-K 68.48 m To walls, service rooms
- J-L 2,636.81 m2 To walls, bathrooms and toilets
- J-M 8,890.12 m2 To walls, apartments
- J-N 1,638.44 m2 To walls, corridors and lobbies
- J-P 256.76 m2 To walls, service rooms
- J-Q 285.04 m2 To ceilings, bathrooms and toilets
- J-R 1,825.56 m2 To ceilings, apartments
- J-S 336.86 m2 To ceilings, corridors and lobbies
- J-T 38.18 m2 To ceilings, service rooms

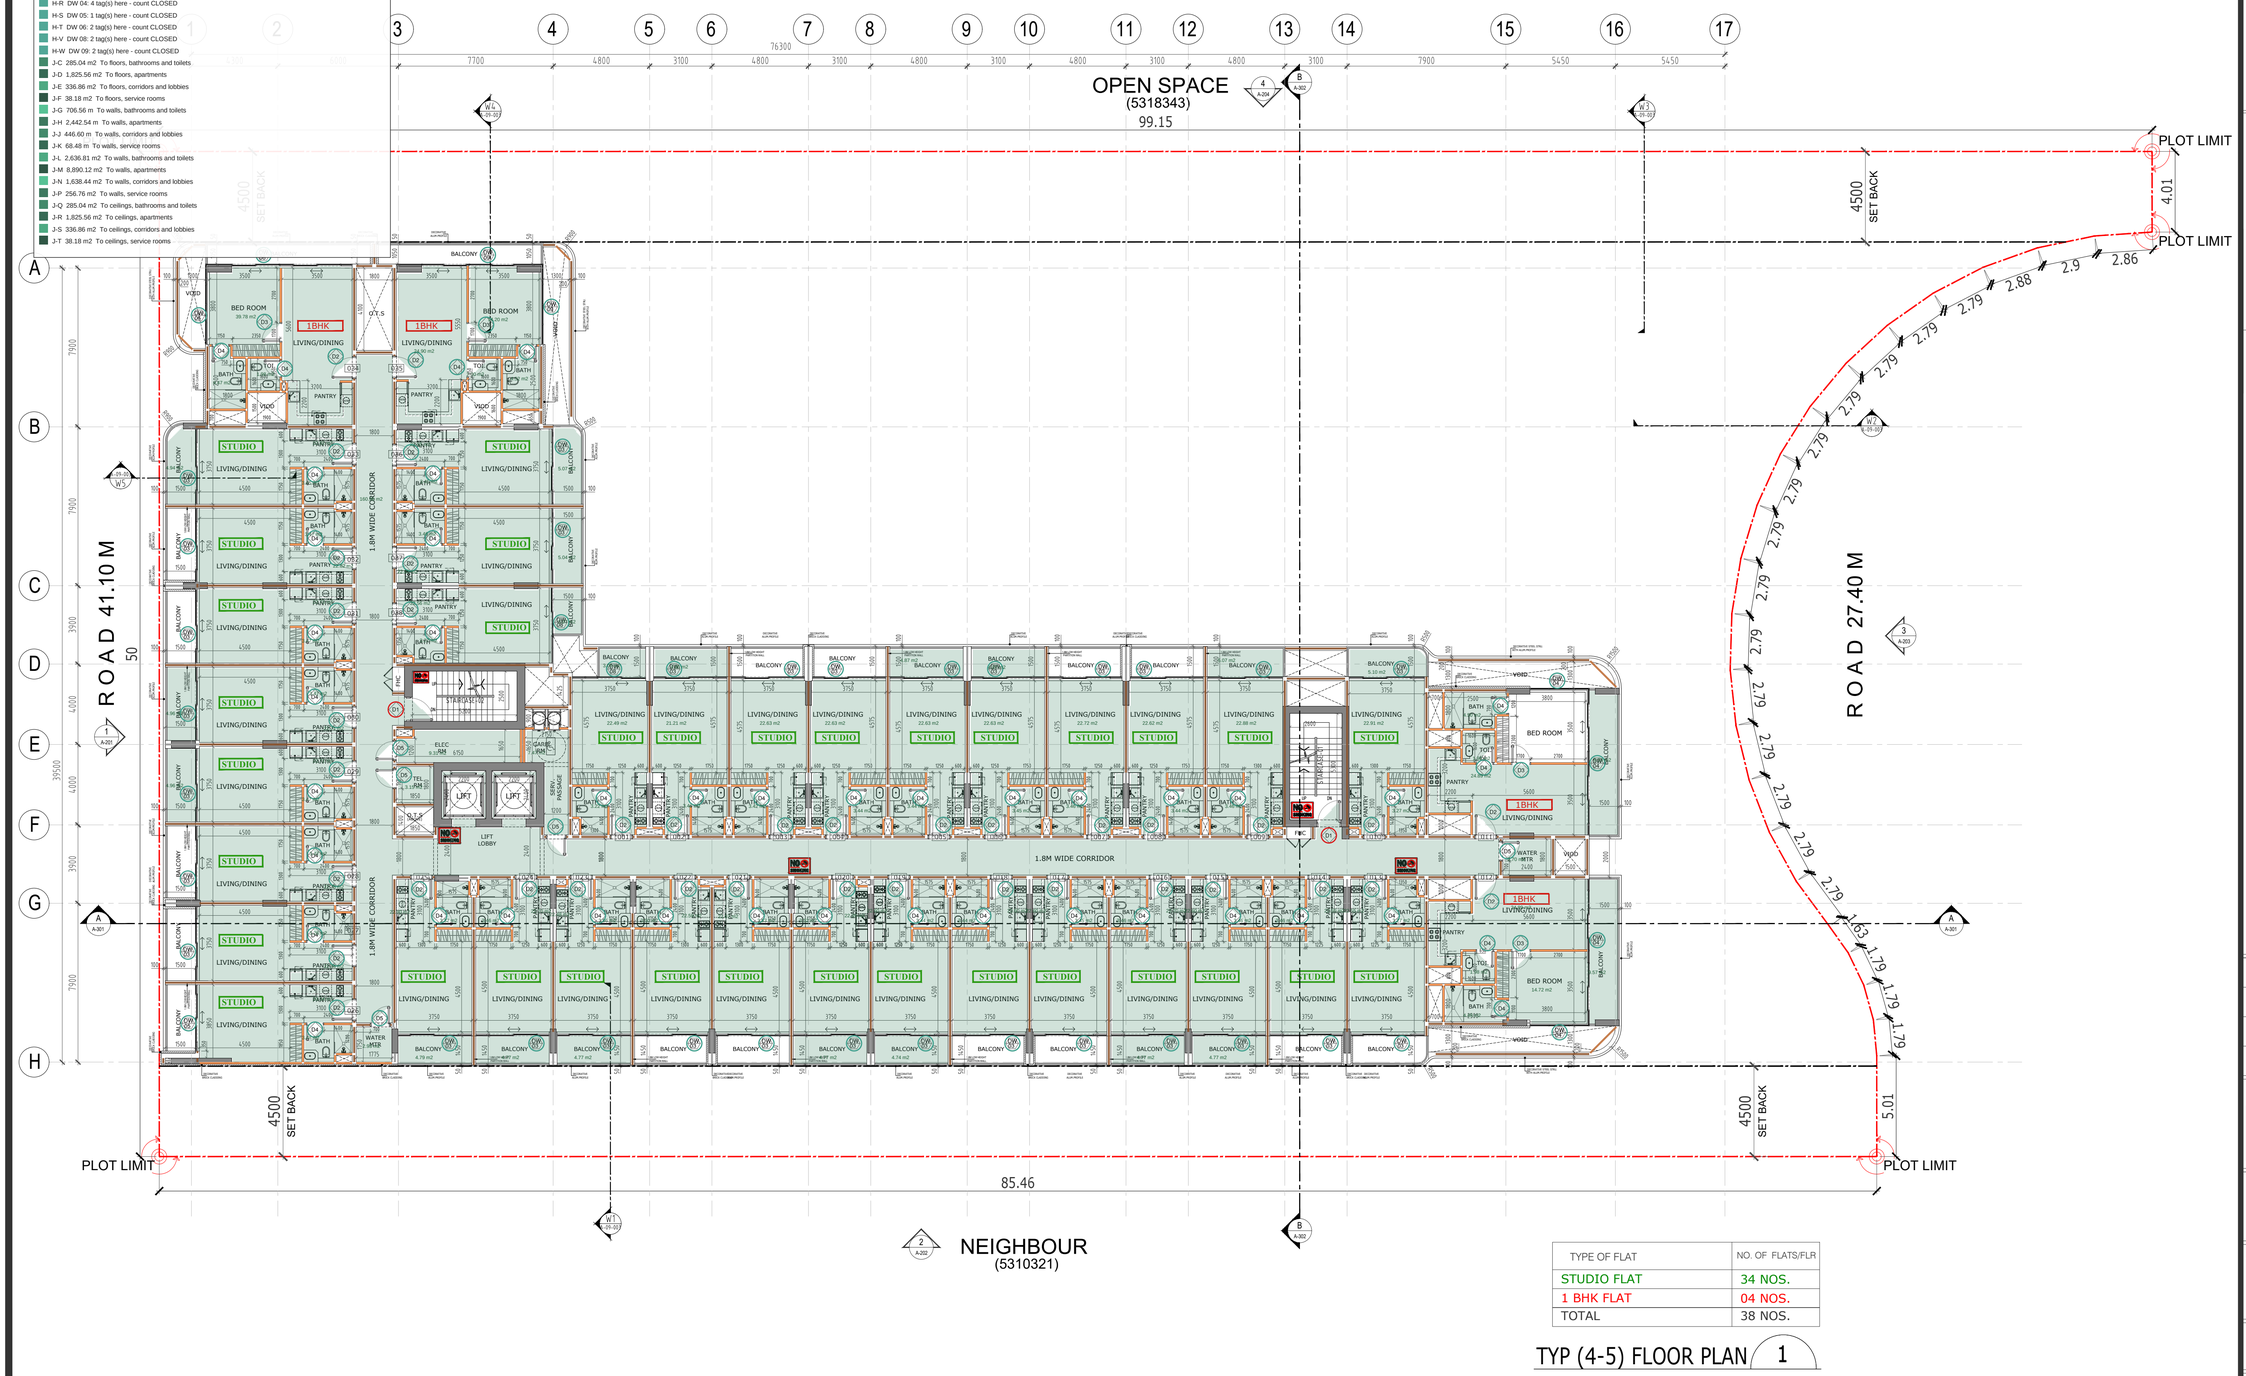


| TYPE OF FLAT | NO. OF FLATS/FLR |
|---|---|
| STUDIO FLAT | 34 NOS. |
| 1 BHK FLAT | 04 NOS. |
| TOTAL | 38 NOS. |

TYP (4-5) FLOOR PLAN 1

NOTES:

1. THIS DRAWING MAY NOT BE REPRODUCED BY ANY MEANS WITHOUT PRIOR APPROVAL FROM EMSQUARE
2. DRAWINGS ARE NOT TO BE SCALED, STATED DIMENSIONS ONLY ARE TO BE TAKEN.
3. ANY INCONSISTENCY OR DISCRIPANCY IS TO BE BROUGHT TO THE ATTENTION OF & RESOLVED BY THE ARCHITECT/ENGINEER BEFORE THE WORK IS PUT IN HAND.

| DATE | DESCRIPTION | BY |
|---|---|---|
| | | |

CONSULTANT :

EMSQUARE
ENGINEERING CONSULTANTS
ARCHITECTS-CIVIL ENGINEERS-INTERIORS
P.O.Box 181903, Tel: +971 4 2729009, Fax: +971 4 2729334
Email: emsquare@emirates.net.ae

OWNER :

**G F S REAL ESTATE L.L.C**

JOB TITLE :

PROPOSED RESIDENTIAL BUILDING (B+G+5+ROOF)

| PLOT NO. / PARCEL ID | BLOCK / COMMUNITY |
|---|---|
| 5310319 | SAIH SHUAIB 2 |

DRAWING TITLE :

TYP ( 4 - 5 ) FLOOR PLAN

| ARCHITECT : | STRUCTURAL ENGR. : | DRAWN : |
|---|---|---|
| SMITHA | | SHAFI |
| SCALE : | DATE : | CHECKED BY : |
| 1:150 | JUN-2025 | BABU |
| JOB NO : | DRAWING NO. : | REVISION NO. : |
| — | A-07-007 | -- |

: D:\ANJU PROJECTS 2023\PROJECTS\GFS\08. 5310319 - COVENTRY RESIDENCE 3 - G F S REAL ESTATE L.L.C\FINAL SUBMISSION\FINAL AUTHORITY SUB\ARCH\CAD\A-07-007 TYP ( 4 - 5 ) FLOOR PLAN.dwg