
A-07-003 GROUND FLOOR PLAN - take-off markup. 23 grid bays matched by label to dimensions stated on other sheets, spread 0.19%; effective scale 1:157.3 (title block 1:150)

TAKE-OFF ON THIS SHEET (trade colours)

- D-A 7.90 m2 Walls, 150mm thick
- D-B 1,000.25 m2 Walls, 200mm thick
- D-D 112.77 m2 Walls, 100mm thick
- G-C 213.96 m To walls
- G-D 2.22 m2 Horizontal surfaces
- H-B LD-1: 1 tag(s) here - count CLOSED
- H-E SD-1: 1 tag(s) here - count CLOSED
- H-F SD-2: 2 tag(s) here - count CLOSED
- H-G SD-3: 1 tag(s) here - count CLOSED
- H-H D-1: 4 tag(s) here - count OPEN
- H-L D-3: 1 tag(s) here - count CLOSED
- H-M D-4: 1 tag(s) here - count CLOSED
- H-N DW 01: 1 tag(s) here - count OPEN
- H-FF DW 18: 1 tag(s) here - count CLOSED
- H-GG DW 19: 1 tag(s) here - count CLOSED
- H-HH LW 01: 1 tag(s) here - count CLOSED
- H-JJ LW 02: 1 tag(s) here - count CLOSED
- J-A 2.22 m2 To floors, bathrooms and toilets, ground
- J-B 92.26 m2 To floors, service rooms, ground floor
- J-G 6.93 m To walls, bathrooms and toilets
- J-K 64.36 m To walls, service rooms
- J-L 37.19 m2 To walls, bathrooms and toilets
- J-P 340.56 m2 To walls, service rooms
- J-Q 2.22 m2 To ceilings, bathrooms and toilets
- J-T 92.26 m2 To ceilings, service rooms

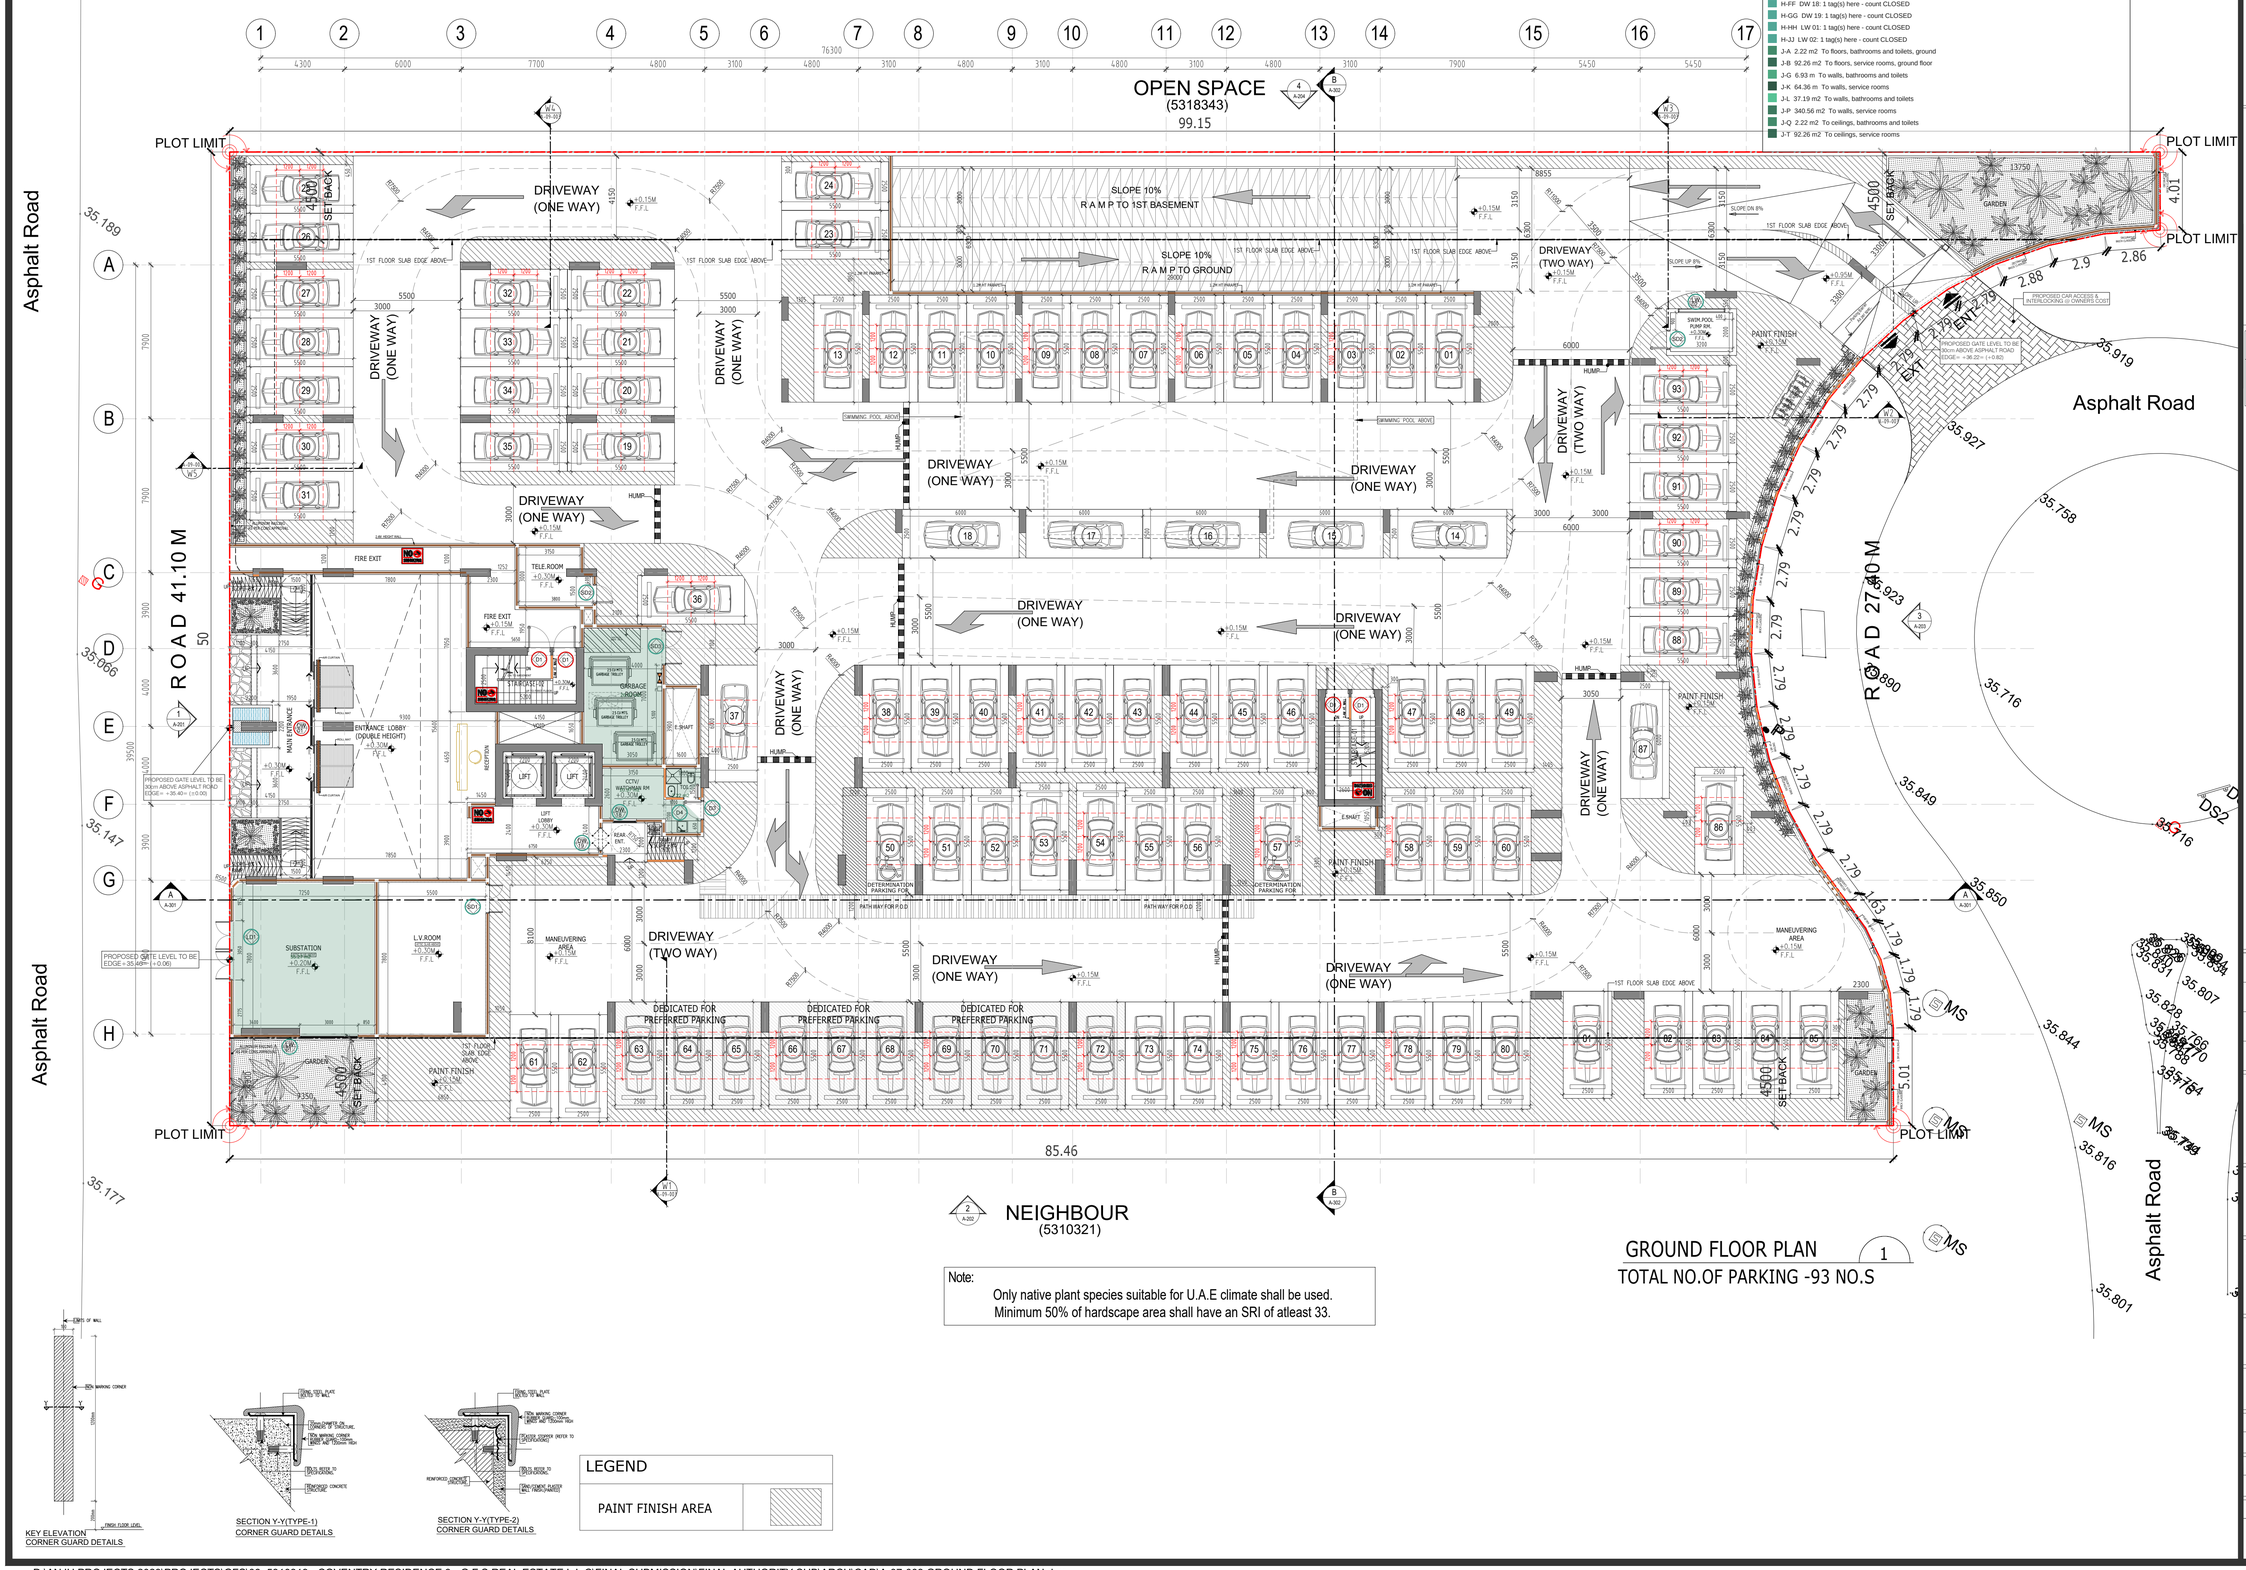

Note:
Only native plant species suitable for U.A.E climate shall be used.
Minimum 50% of hardscape area shall have an SRI of atleast 33.

GROUND FLOOR PLAN 1
TOTAL NO.OF PARKING -93 NO.S

KEY ELEVATION
CORNER GUARD DETAILS

SECTION Y-Y(TYPE-1)
CORNER GUARD DETAILS

SECTION Y-Y(TYPE-2)
CORNER GUARD DETAILS

LEGEND	
PAINT FINISH AREA	

NOTES:

1. THIS DRAWING MAY NOT BE REPRODUCED BY ANY MEANS WITHOUT PRIOR APPROVAL FROM EMSQUARE
2. DRAWINGS ARE NOT TO BE SCALED, STATED DIMENSIONS ONLY ARE TO BE TAKEN.
3. ANY INCONSISTENCY OR DISCRIPANCY IS TO BE BROUGHT TO THE ATTENTION OF & RESOLVED BY THE ARCHITECT/ENGINEER BEFORE THE WORK IS PUT IN HAND.

LEGEND

PAINT FINISH AREA	

DATE	DESCRIPTION	BY

CONSULTANT :

EMSQUARE
ENGINEERING CONSULTANTS
ARCHITECTS-CIVIL ENGINEERS-INTERIORS
P.O.Box 181903, Tel: +971 4 2729099, Fax: +971 4 2729334
Email: emsquare@emirates.net.ae

OWNER :

G F S REAL ESTATE L.L.C

JOB TITLE :

PROPOSED RESIDENTIAL BUILDING (B+G+5+ROOF)

PLOT NO. / PARCEL ID	BLOCK / COMMUNITY
5310319	SAIH SHUAIB 2

DRAWING TITLE :

GROUND FLOOR PLAN

ARCHITECT :	STRUCTURAL ENGR. :	DRAWN :
SMITHA		SHAFI
SCALE :	DATE :	CHECKED BY :
1:150	JUN-2025	BABU
JOB NO :	DRAWING NO. :	REVISION NO. :
—	A-07-003	--

: D:\ANJU PROJECTS 2023\PROJECTS\GFS\08. 5310319 - COVENTRY RESIDENCE 3 - G F S REAL ESTATE L.L.C\FINAL SUBMISSION\FINAL AUTHORITY SUB\ARCH\CAD\A-07-003 GROUND FLOOR PLAN.dwg