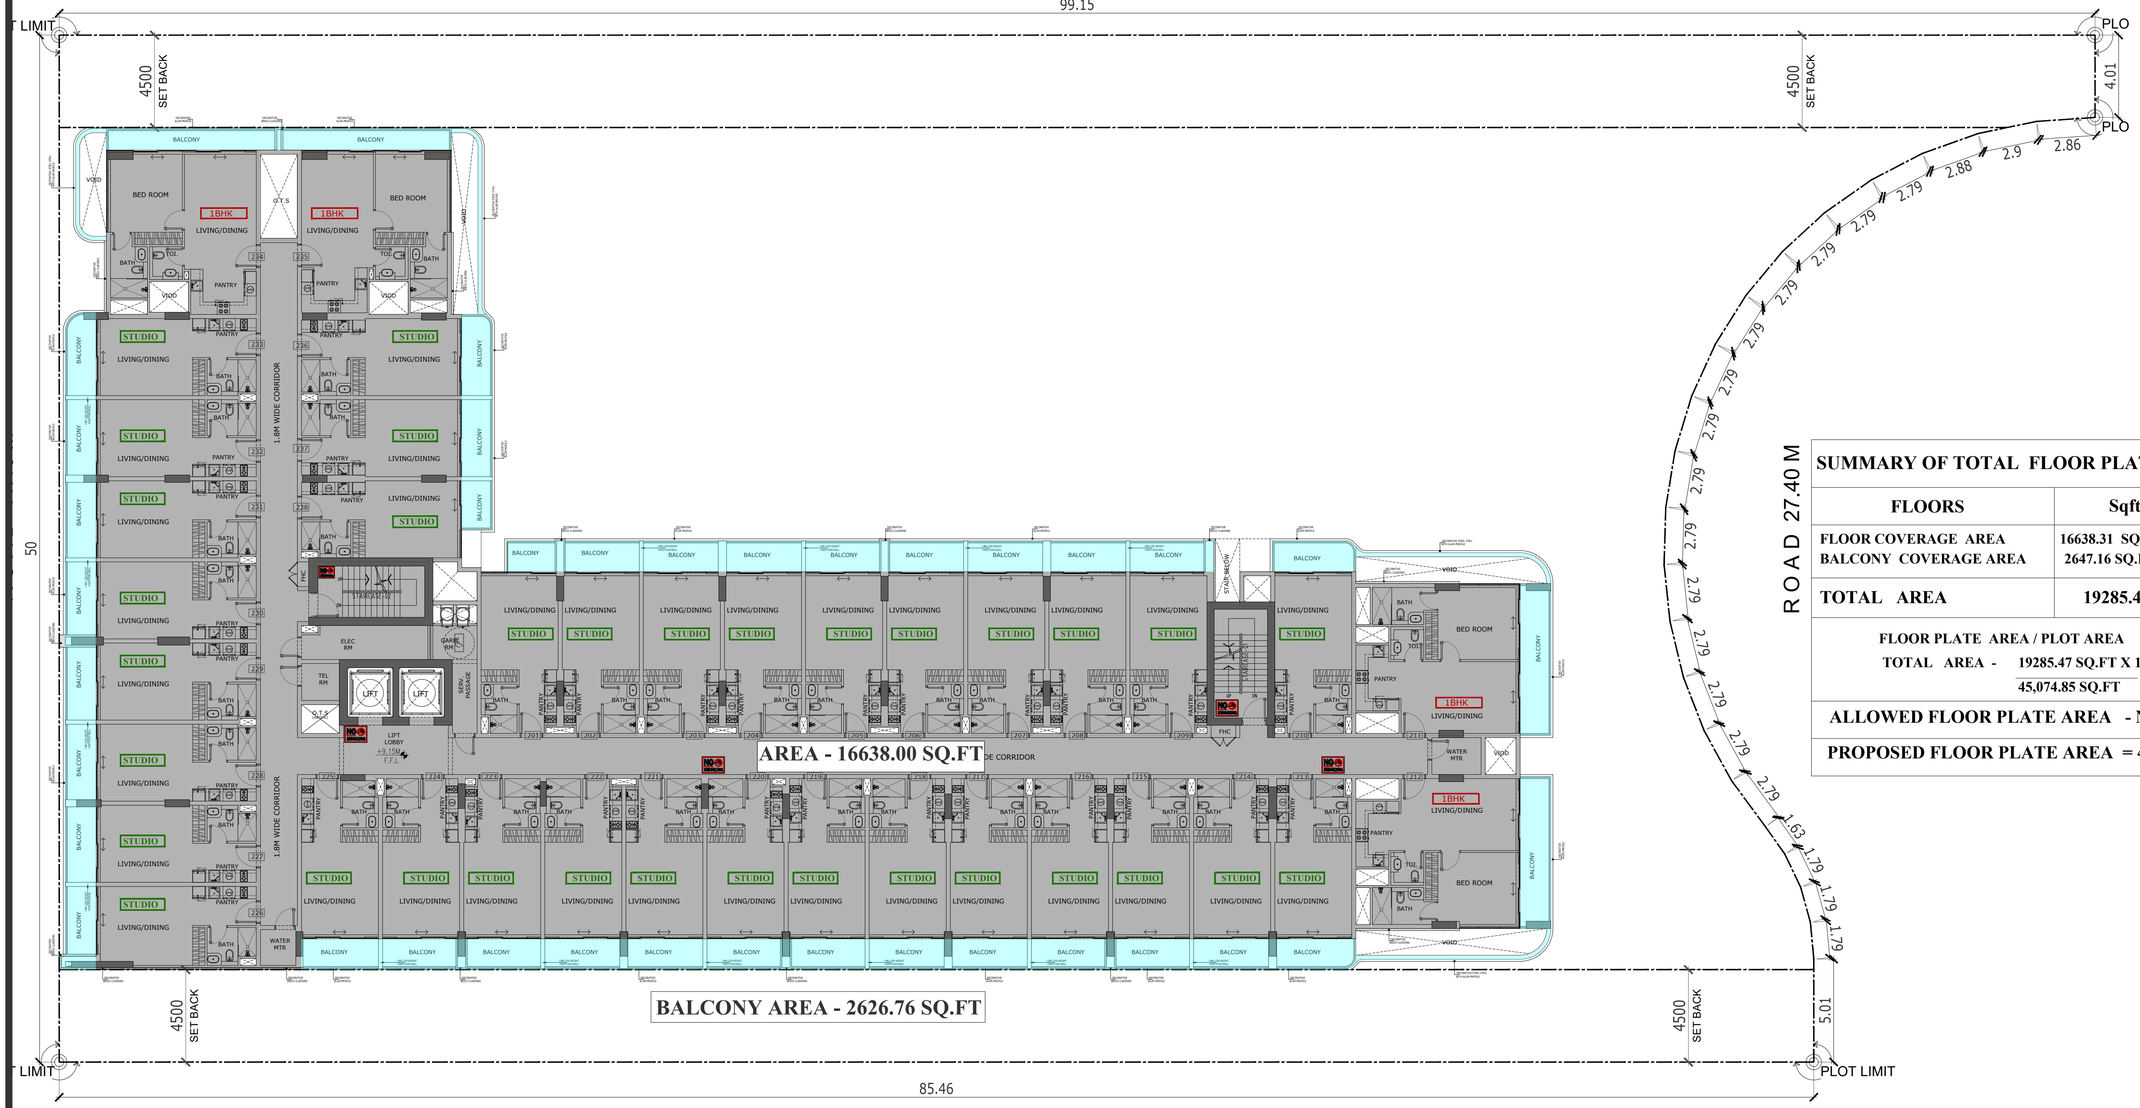


SUMMARY OF TOTAL FLOOR PLATE AREA

FLOORS	Sqft
FLOOR COVERAGE AREA	16638.31 SQ.FT (36.91%)
BALCONY COVERAGE AREA	2647.16 SQ.FT (5.87%)
TOTAL AREA	19285.47 SQ.FT

FLOOR PLATE AREA / PLOT AREA

TOTAL AREA - $\frac{19285.47 \text{ SQ.FT} \times 100}{45{,}074.85 \text{ SQ.FT}} = 42.78\%$

ALLOWED FLOOR PLATE AREA - N/A

PROPOSED FLOOR PLATE AREA = 42.78%

NOTES:

1. THIS DRAWING MAY NOT BE REPRODUCED BY ANY MEANS WITHOUT PRIOR APPROVAL FROM EMSQUARE
2. DRAWINGS ARE NOT TO BE SCALED, STATED DIMENSIONS ONLY ARE TO BE TAKEN.
3. ANY INCONSISTENCY OR DISCRIPANCY IS TO BE BROUGHT TO THE ATTENTION OF & RESOLVED BY THE ARCHITECT/ENGINEER BEFORE THE WORK IS PUT IN HAND.

RESIDENTIAL PARKING CALCULATIONS

APARTMENT TYPE	NO. OF UNITS	NO. OF CARS	TOTAL NO. OF CARS
STUDIO UNIT	165	1.00	165
1 BED UNIT	20	1.00	20
TOTAL NO. OF CARS			185
TOTAL CAR PARKING REQUIRED			185
TOTAL CAR PARKING PROPOSED			190

TOTAL AFFECTED CAR PARKING
WIDTH NEAR STRUCTURAL COLUMNS = 14 NO.S (7.36%)

SUBJECTED TO AUTHORITY SPECIAL APPROVAL

BICYCLE PARKING CALCULATIONS

REQUIRED 5% OF TOTAL No OF PARKING	
185X5%= 9.25 NOS	9.25 NOS
TOTAL BICYCLE PARKING PROVIDED	10 NOS

PREFERRED PARKING CALCULATIONS

REQUIRED 5% OF TOTAL No OF PARKING	
185X5%= 9.25 NOS	9.25 NOS
TOTAL PREFERED PARKING PROVIDED	10 NOS

ACCESSIBLE PARKING CALCULATIONS

REQUIRED PARKING (TOTAL NUMBER*2/100)	
(185*2)/100= 3.70NOS	3.70 NOS.
TOTAL POD PARKING PROVIDED	4 NOS

SUMMARY FOR GARBAGE CONTAINER

CALCULATIONS	WEIGHT	NO.OF CONT.REQUIRED.
(TOTAL COMMERCIAL AREA= /1000) x12 KG	-	806.76 KG / 250 = 3.22NOS
(TOTAL OFFICES AREA = /1000)x 5 KG	-	
(TOTAL RESIDENTIAL AREA= 67,230.30 SQ. FT. SQ.FT/1000) x12 KG	806.76 KG	
TOTAL WEIGHT =	806.76 KG	3 NOS.(CAP.2.5m3)

DATE	DESCRIPTION	BY

CONSULTANT :

EMSQUARE
ENGINEERING CONSULTANTS
ARCHITECTS-CIVIL ENGINEERS-INTERIORS
P.O. Box 181903, Tel: +971 4 2729009, Fax: +971 4 2729334
Email: emsquare@emirates.net.ae

OWNER :

G F S REAL ESTATE L.L.C

JOB TITLE :

PROPOSED RESIDENTIAL BUILDING (B+G+5+ROOF)

PLOT NO. / PARCEL ID	BLOCK / COMMUNITY
5310319	SAIH SHUAIB 2

DRAWING TITLE :

AREA CALCULATION-3

ARCHITECT :	STRUCTURAL ENGR. :	DRAWN :
SMITHA		SHAFI
SCALE :	DATE :	CHECKED BY :
	JUN-2025	BABU
JOB NO :	DRAWING NO. :	REVISION NO. :
—	A-03-003	--

: D:\ANJU PROJECTS 2023\PROJECTS\GFS\08. 5310319 - COVENTRY RESIDENCE 3 - G F S REAL ESTATE L.L.C\FINAL SUBMISSION\FINAL AUTHORITY SUB\ARCH\CAD\A-03-001TOA-03-004 AREA CALCULATION.dwg